


I/A Series® Hardware

0 to 20 mA I/O Interface Module (FBM04)

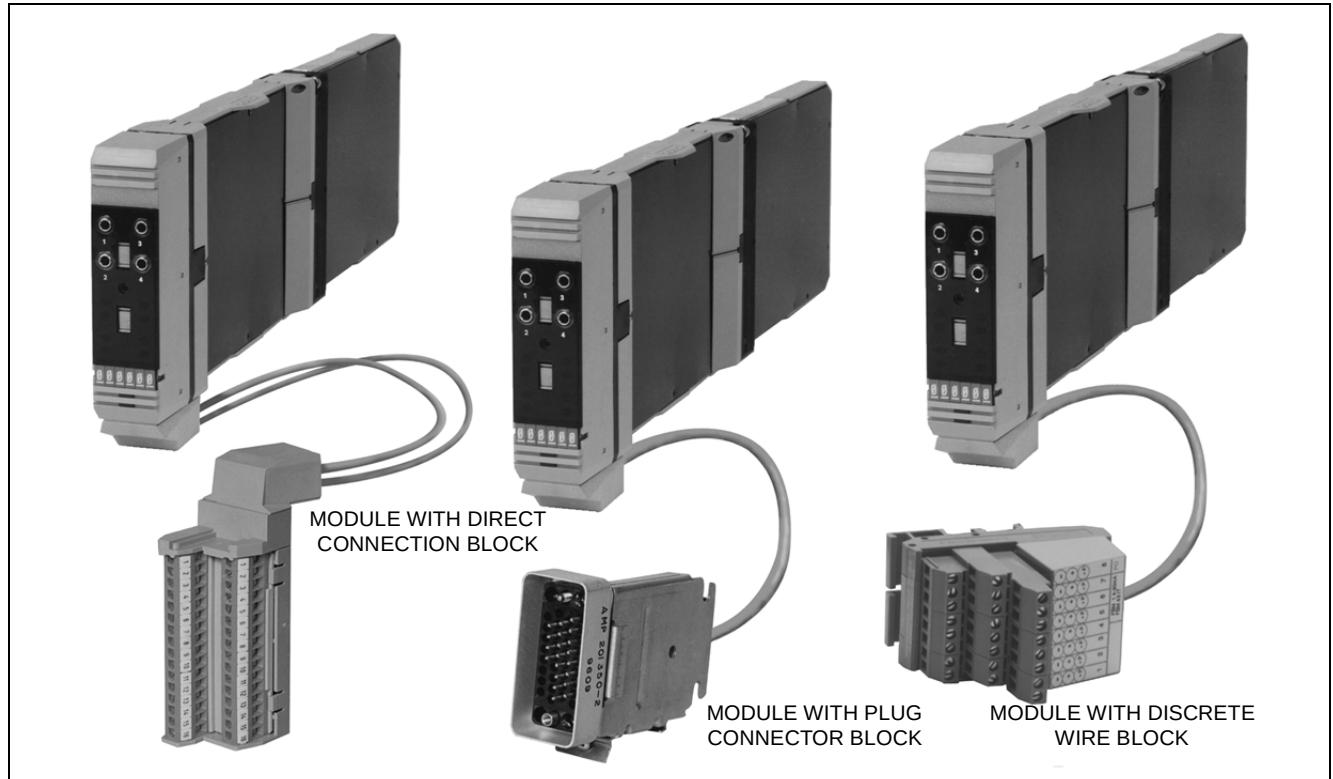

The 0 to 20 mA Input/Output Interface Module contains four 20 mA dc analog input channels and four 20 mA dc analog output channels. Each input channel accepts an analog sensor input such as a 4 to 20 mA transmitter or a self-powered 20 mA source. Each output channel drives an external load and produces a 0 to 20 mA output. The module performs the signal conversion required to interface the electrical input/output signals from/to the field sensors and actuators to/from the redundant Fieldbus. The module is a main type, and independently connects to the redundant Fieldbus.

This module executes the analog I/O application program. The configurable options for this program are Analog Input Resolution (on a per module basis), Fail-Safe Configuration (Hold/Fallback), Analog Output Fail-Safe Fallback Data, (on a per channel basis), Fieldbus Switching Enable and Fieldbus Switching Time.

An optional style of termination cable assembly is available which includes built-in bypass jacks for each output channel on the front connector of the Fieldbus Module. Jacks accept a bypass plug from the I/A Series Output Bypass Station or other external 20 mA source. This option should be considered for applications where maintaining output is desired during maintenance operations, for example, when replacing a failed module.

FUNCTIONAL SPECIFICATIONS

Common Characteristics

POWER REQUIREMENTS

Input Voltage Range (Redundant)
26 to 42 V dc

Consumption
14 W (maximum)

Heat Dissipation
12 W (maximum)

Isolation

The module withstands, without damage, a potential of 600 V ac applied for one minute between any channel and earth (ground), or between a given channel and any other channel.

NOTE

This does not imply that these channels are intended for permanent connection to hazardous voltage circuits. Connection of these channels to voltages greater than 30 V ac or 60 V dc violates electrical safety code requirements and may expose users to electric shock.

Input Channels

INPUT

4 isolated and independent channels

INPUT RANGE (EACH CHANNEL)

0 to 20.4 mA dc

ACCURACY

±0.05% of span

COMMUNICATION

Via a redundant Fieldbus

INPUT CONNECTIONS

Two configurations (see Figure 1)

CONVERSION TIME (SOFTWARE CONFIGURABLE)

See Table 1 (Input Specifications)

Output Channels

OUTPUT

4 isolated and independent channels

OUTPUT RANGE (EACH CHANNEL)

0 to 20.4 mA dc

OUTPUT LOAD (MAXIMUM)

735 Ω

COMPLIANCE VOLTAGE

18.6 V nominal at 20 mA dc at I/O field terminals

ACCURACY

±0.05% of span (25°C)

OUTPUT TEMPERATURE COEFFICIENT

100 ppm/°C

COMMUNICATION

Via a redundant Fieldbus

SETTLING TIME

100 ms to settle within a 1% band of steady state for a 10 to 90% input step change.


LINEARITY ERROR

±0.025% of span (monotonic)

RESOLUTION


12 bits

MODULE-POWERED TRANSMITTER

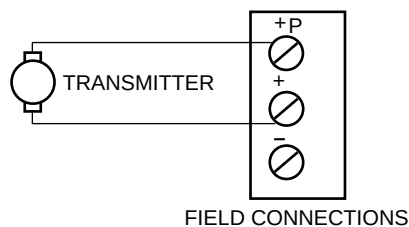

INPUT COMPLIANCE VOLTAGE
22 VOLTS MINIMUM AT 20 mA

EXTERNALLY POWERED TRANSMITTER

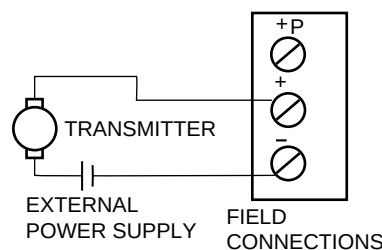

INPUT RESISTANCE 50 Ω

Figure 1. Input Connections

Table 1. Input Specifications

Conversion Time (Seconds)	Update Time (Milliseconds)	Settling Time(a) (Seconds)	Linearity Error(b) (% of Range)	Resolution (Bits)
0.1	10	0.25	0.0125	12
0.2	10	0.50	0.0075	13
0.5	25	1.00	0.005	14
1.0	50	2.00	0.005	15

(a) Value settles within a 1% band of steady state for a 10 to 90% input step change.

(b) Monotonic; assures that the signal for Fieldbus communications either increases or remains the same for increasing analog input signals.

ENVIRONMENTAL SPECIFICATIONS(a)

Operating

TEMPERATURE

0 to 60°C (32 to 140°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

ALTITUDE

-300 to +3,000 m (-1,000 to +10,000 ft)

Storage

TEMPERATURE

-40 to +70°C (-40 to +158°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

ALTITUDE

-300 to +12,000 m (-1,000 to +40,000 ft)

Contamination

Class G3 (Harsh) as defined in ISA Standard, S71.04

(a) The environmental limits of this module may be enhanced by the type of enclosure containing the module. {Refer to the applicable Product Specification Sheet (PSS) which describes the specific type of enclosure that is to be used.}

PHYSICAL SPECIFICATIONS

Mounting

WITH Y-ADAPTER

Installable in the 1x8 Mounting Structure,
I/A Series Industrial Enclosures and Field
Enclosure 8

WITHOUT Y-ADAPTER

Installable in I/A Series Field Enclosure 4 and the
1x8 FBM Mounting Structure

Mass

1 kg (2.2 lb)

Indicators (mounted on termination connector)

OPERATIONAL STATUS

Red and green light-emitting diodes (LEDs)

Bypass Jacks

Available on optional termination cable assembly.

Field Termination Connections(a)

DISCRETE WIRE BLOCK

Input Channels

12 screw-clamp terminals

Output Channels

8 screw-clamp terminals

DIRECT CONNECTION BLOCK

Input Channels

12 screw-clamp terminals

Output Channels

8 screw-clamp terminals

PLUG CONNECTOR BLOCK

34-pin connector. Mates with:

- Burndy MSD 34 PM 118
(plug with bar-type cable clamp)
- Burndy MSD 34 PM 124
(plug with clamshell hood)
- Burndy MSD 34 PM 824
(plug with suitcase hood)
- or equivalent

(a) The discrete wire or plug connector block is available on termination cable assemblies for all enclosures excluding the Local Enclosures, Field Enclosure 4, and Multiple (Bridged) Industrial Enclosure 32. The direct connection block is available only on the termination cable assembly for the Local Enclosures and Field Enclosure 4. Multiple (Bridged) Industrial Enclosure 32s use the plug connector block only.

The Foxboro Company

33 Commercial Street
Foxboro, Massachusetts 02035-2099
United States of America

<http://www.foxboro.com>

Inside U.S.: 1-508-543-8750 or 1-888-FOXBORO (1-888-369-2676)

Outside U.S.: Contact your local Foxboro Representative.

Foxboro and I/A Series are registered trademarks of The Foxboro Company.

Copyright 1991-1999 by The Foxboro Company
All rights reserved