

# I/A Series® Hardware

PSS 21H-2X15 B4

## G15 System Enclosure



The I/A Series® G15 System Enclosure with front-only access provides environmental protection and housing for I/A Series DIN rail mounted subsystem modules.

### FEATURES

The I/A Series G15 system enclosure with front-access only offers the following features:

- ▶ 800w x 800d x 2000mm high enclosure, available as vented or sealed; vented enclosure accommodates up to 96 Fieldbus Modules (FBMs) in up to twelve Modular Baseplates, and sealed enclosure accommodates up to 32 FBMs
- ▶ Vented enclosure accommodates up to three 2-position Modular Baseplates to support Field Control Processors (FCP270s)/Fieldbus Communications Modules
- ▶ All equipment accessible from the front of the enclosure only
- ▶ Enclosure selection for use in ordinary (IP 43/54) or harsh (IP 55/65) rated environments
- ▶ Compact design to minimize use of floor space with front-only access that allows the maximum density of enclosures in a control room environment
- ▶ Option for single or redundant power supplies
- ▶ Bottom or top cable entry for termination assembly cables and power wiring, but can be customer configured for simultaneous top and bottom cable entry
- ▶ Conveniently placed eyebolts for transporting and lifting the enclosures

- ▶ A 100 mm (4 in) plinth - total enclosure height of 2160 mm (85.0 in)
- ▶ Optional handles with push-button/keylocks
- ▶ Standard safety earthing (grounding) studs and optional safety earthing (grounding) rail.

## **INTRODUCTION**

The G15 enclosure is specifically designed for housing DIN rail mounted subsystem modules in areas where front access only to the enclosure's equipment is desired, such as when an enclosure must be placed against a wall. The G15 enclosure is available as a vented enclosure or sealed enclosure.

The G15 vented enclosure can be configured with:

- ▶ Up to twelve 8-position vertically mounted Modular Baseplates, for mounting up to 96 Fieldbus Modules (FBMs)
- ▶ Up to three 2-position Modular Baseplates to support Field Control Processors (FCP270s)/ Fieldbus Communications Modules (FCMs)
- ▶ Up to six FPS400-24 power supplies (redundant power) to support the Modular Baseplates.

The G15 sealed enclosure can be configured with:

- ▶ Up to four 8-position vertically mounted Modular Baseplates, for mounting up to 32 Fieldbus Modules (FBMs)
- ▶ One 2-position Modular Baseplate to support Field Control Processors (FCP270s)/ Fieldbus Communications Modules (FCMs)
- ▶ Up to two FPS400-24 power supplies (redundant power) to support the Modular Baseplates.

The G15 vented enclosure is a free-standing, floor mounted unit with an IP 43/54 rating for location in mild (ordinary) environmental areas.

The G15 sealed enclosure is a free-standing, floor mounted unit, with options for either an IP 55 or IP 65 rating for location in harsh environments. Sealed enclosures with an IP 65 rating provide a higher level of protection from airborne contamination.

Multiple IP 43/54 rated G-series front-access only enclosures, IP 43/54 rated, can be installed connected to one another to maximize the use of floor space and ease of cabling. The enclosures can be bayed together using third-party kits.

To preserve the IP 55/65 protection classification for sealed enclosures, they cannot be adjoined.

This enclosure and its configurations have been tested and qualified by Invensys for use with specified DIN rail mounted subsystem modules.

## **INGRESS PROTECTION**

The metal enclosures provide the outer layer of protection for the control electronics. Other layers are provided by the module covers and built into the modules. This approach to protection means that a minimum of contaminants in the plant environment reaches the control components, thus greatly extending the life of the equipment.

For sealed IP 55/65 certified enclosures, heat is transferred from the interior surfaces of the enclosure and then dissipated by the enclosure's exterior surfaces into the plant environment. Air is not exchanged between the enclosure's interior and the outside environment; therefore, contaminants are minimized inside the enclosure. Sealed IP 55/65 versions can be used outdoors in sheltered locations.

The enclosures support convenient top or bottom cable entry for termination assembly cabling and power wiring. Vented enclosures with roof-mounted fans are not recommended with top cable entry.

## THERMAL PROTECTION

Ventilation fans along with a vented door increase circulation for heat removal and can be used:

- ▶ At installations with only moderate levels of airborne contaminants, enclosure interiors can be exposed to allow plant air to circulate and remove the heat generated within the modules
- ▶ In areas where there are no requirements to filter the air to which the modules in the enclosure are exposed (such as office areas).

Vented enclosures contain a dual fan assembly located at the top of the enclosure or two fan assemblies located on the enclosure front door. Enclosures with a vented door can be located in main equipment areas or in an environment with office air quality.

## DUAL THERMOSTAT

An optional dual (high/low) thermostat is available to monitor enclosure temperature extremes, with the exception of Zone 2 (IEC) / Class I, Division 2 applications.

## MODULAR BASEPLATE MOUNTING

The enclosure can contain various types of vertically mounted Modular Baseplates, which accommodate different quantities and types of modules: FCPs/FBMs/FCMs.

For the enclosure to accommodate a higher density of modules and maximize accessibility and space for termination assembly cables, the baseplates are mounted in a vertical position. Vertical cable runs minimize the need to dress and route cables at ninety-degree angles while providing a direct path for cable access to the bottom or top of the enclosure. While improving layout, vertical orientation also reduces any horizontal obstructions, thus increasing airflow and improving overall thermal performance.

For more information on the various types of Modular Baseplates in an I/A Series system, refer to *DIN Rail Mounted Modular Baseplates* (PSS 21H-2W6 B4).

## VENTED ENCLOSURE DESIGN OPTIONS

The G15 vented enclosure is available with either roof-mounted or door-mounted fans.

Roof-mounted fans provide the best performance for cooling, and provide a lower noise-level than the door-mounted fans, at the cost of restricting top-entry cable access to the enclosure and reducing the overall ingress protection rating. For customers who plan to modify the swing direction of their enclosure door, fans mounted on the roof allow the process to proceed more smoothly.

Door-mounted fans are desirable for top entry cable access configurations, and provide the highest level of ingress protection for vented enclosures.

## FIELDBUS I/O GROUPS

### Vented Enclosures

The vented G15 system enclosure has four vertical DIN rails for mounting vertically mounted Modular Baseplates and their power supplies. All are accessible from the front of the enclosure only - one each on the left and right sides, and two in the rear. Three of the DIN rails can mount up to four 8-position FBM Modular Baseplates, and the Baseplates on each rail are called a Fieldbus Input/Output (I/O) Group. Each Fieldbus I/O Group has an optionally redundant FPS400 power supply associated with the group and an optional 2-position vertically mounted Modular Baseplate for FCMs/FCPs associated with the group. These power supplies and FCMs/FCP Baseplates are mounted on the second DIN rail mounted on the rear of the enclosure (see Figure 1 and Figure 2).

### **Sealed Enclosures**

The sealed G15 enclosure uses two of its four vertical DIN rails for mounting vertically mounted Modular Baseplates. The DIN rails are accessible from the front of the enclosure only.

Due to the thermal load and the reliance on conductive cooling, sealed enclosures have a limited loading capacity. One DIN rail can mount up to four 8-position Modular Baseplates and the other DIN rail mounts the redundant power supplies and one 2-position vertically mounted Modular Baseplate for FCMs/FCPs. Sealed enclosures use only the components in the Fieldbus Input/Output (I/O) Group 1 (see Figure 1 and Figure 2). Fieldbus I/O Group 1 has an optionally redundant FPS400 power supply and an optional 2-position vertically mounted Modular Baseplate for FCMs/FCPs associated with the group.

### **TERMINATION ASSEMBLY/INPUT POWER CABLING**

The enclosures can be ordered for bottom cable entry or top cable entry or modified by the customer for simultaneous top and bottom cable entry.

For the top cable entry version, the termination assembly cables and/or customer power feeds enter through customer-configured cable glands. Any customizations made must follow the enclosure manufacturer's guidelines to preserve the enclosure's ingress protection rating. Vented enclosures with roof-mounted fans are not recommended for top cable entry.

For the vented bottom entry version, the termination assembly cables and power cable enter through removable gland plates, located at the bottom (inside) of the enclosure, which can be removed, drilled, or punched for cable routing.

For the sealed bottom entry version, the termination assembly cables and power cable enter through a solid bottom panel located at the bottom (inside) of the enclosure, which can be drilled, or punched for cable routing. Users must provide their own cable glands (for top or bottom cable entry), in keeping with maintenance of the enclosure's ingress protection.

Cable straps are provided in the enclosure to dress and support the termination assembly cables. Field I/O signals must be connected to the TA mounted in an adjoining I/A Series termination enclosure.

### **POWER AND EARTHING (GROUNDING)**

The G15 enclosure supports an optional redundant power system, in which dual power distribution (two power supplies fed by independent entry sources) provides redundancy protection against power failures.

Power wiring to the enclosure is routed through the bottom or top of the enclosure. Optional dual power input feeds terminate at dedicated primary and secondary power distribution terminal blocks.

All enclosure structural elements are integrally earthed by the enclosure design to meet the appropriate industry regulations and standards.

The G15 enclosure uses a DIN rail mounted power supply that provides 24 V dc to DIN rail mounted baseplates. The power supply is agency certified for use in Zone 2 (IEC) / Class I, Division 2 applications. For more information, refer to *DIN Rail Mounted Power Supply* (PSS 21H-2W3 B4).

### **Earthing (Grounding)**

Two M8 studs (one for each enclosure side) provide a central earth (ground) point and dedicated earthing points when baying enclosures together.


An optional isolated bus bar is available for additional earth (ground) points.

### **Power Distribution**

Each power distribution terminal block assembly (primary, secondary or utility for powering fans and lights, see Figure 1) has dedicated ring lug assembly terminal blocks for customer main power. Each also has fused, knife disconnect terminal blocks for interrupting the main power, as well as independent knife disconnect terminal blocks for each device, for ease of service.


Additional blocks are provided for the customer to install utility outlets.

The enclosure is available without these power distribution terminal blocks when the customer has requirements for power distribution specific to regional electrical codes.

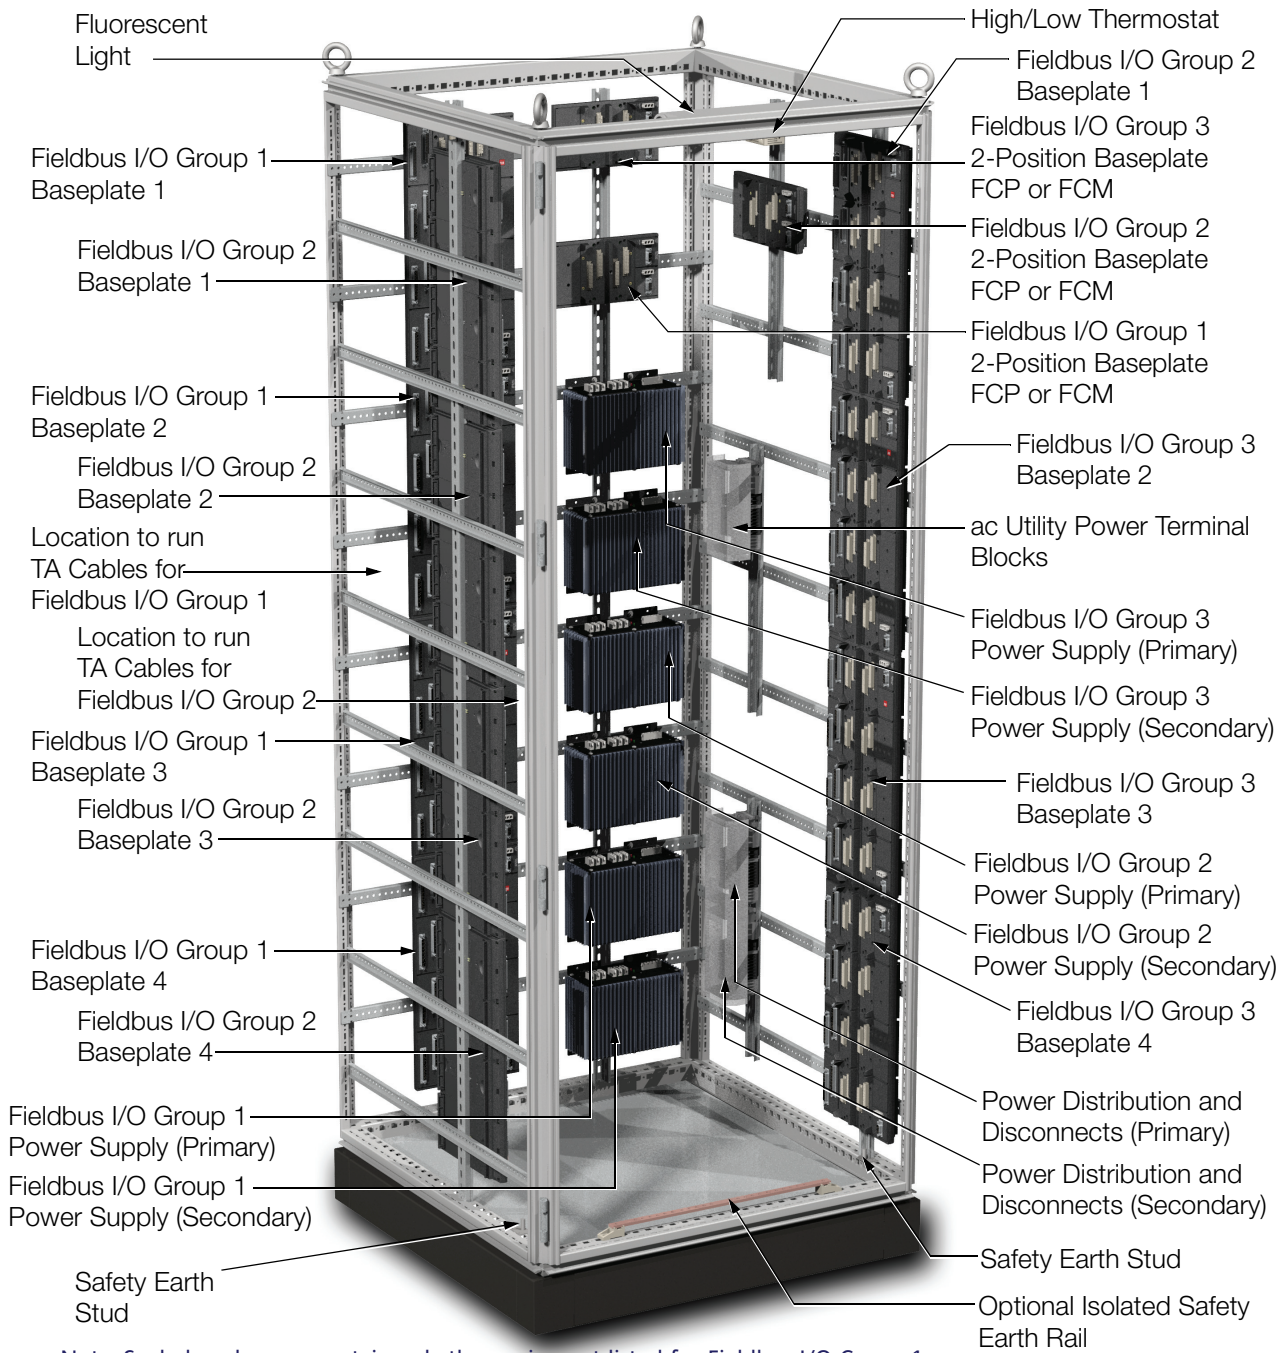

Note: Sealed enclosures contain only the equipment listed for Fieldbus I/O Group 1.

Figure 1. G15 System Enclosure, Front Left View

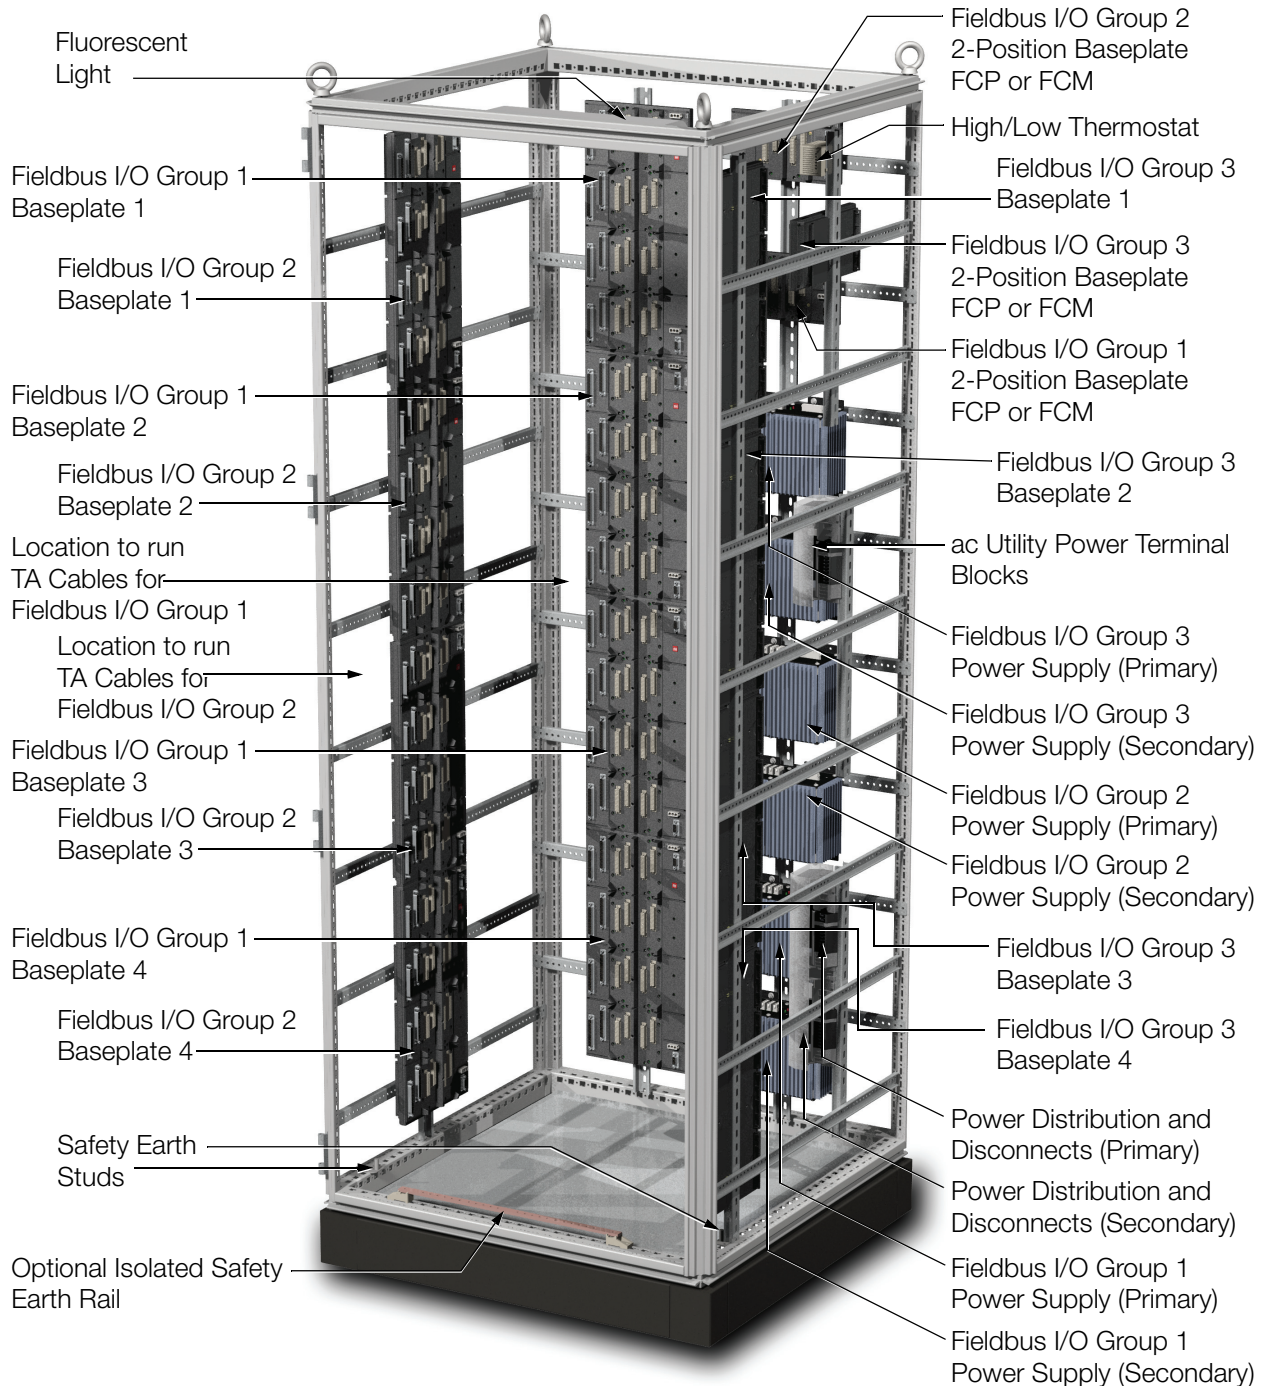

Note: Sealed enclosures do not contain equipment listed for Fieldbus I/O Group 2 and 3.

Figure 2. G15 System Enclosure, Front Right View

## ENCLOSURE OPTIONS

The G15 enclosure can be configured with the following options:

- ▶ Ingress Protection
  - Vented IP 43/54 rated enclosure with dual front door-mounted fans (120 V ac or 240 V ac) or dual roof-mounted fans (120 V ac or 240 V ac - dual fans), or
  - Sealed IP 55 rated enclosure
  - Sealed IP 65 rated enclosure
- ▶ Enclosure Construction
  - Bottom cable entry or top cable entry (top entry not recommended for roof-mounted fans)
  - Side wall option is configurable based on baying requirements
  - Optional comfort handle with push-button/keylock
  - Universal mounting for left and right-hand door swing (left-hand is default)
- ▶ Vented Enclosures
  - Up to 3 Fieldbus I/O Groups
  - Up to twelve 8-position Modular Baseplates for housing up to 96 FBMs (total of 96 FBMs per vented enclosure)
  - Up to three 2-position Modular Baseplate for FCMs/FCPs
  - Up to six FPS400-24 power supplies per Fieldbus I/O Group to support the Modular Baseplates (total of 6 power supplies per vented enclosure)
- ▶ Sealed Enclosures
  - One Fieldbus I/O Group
  - Up to four 8-position Modular Baseplates for housing up to 32 FBMs (total of 32 FBMs per sealed enclosure)
  - One 2-position Modular Baseplate for FCMs/FCPs
  - Up to two FPS400-24 power supplies to support the Modular Baseplates
- ▶ Enclosure Electrical Accessories<sup>(1)</sup>
  - Universal single enclosure light with motion activation
  - Dual temperature thermostat
  - Dual door-mounted or roof-mounted fans
  - Safety Earthing (Grounding) studs and optional isolated safety grounding rail for additional connectors
- ▶ Power Options<sup>(1)</sup>
  - 100-250 V ac, 50-60Hz, 125 V dc input primary only or primary and secondary power with optional 120 V ac or 240 V ac utility power terminal block
  - 100-250 V ac, 50-60Hz, 125 V dc input primary and 24 V dc secondary power with optional 120 V ac or 240 V ac utility power terminal block
  - 24 V dc input primary only or primary and secondary power with optional 120 V ac or 240 V ac utility power terminal block
  - Additionally, customer configured power entry (no terminal blocks supplied)

---

(1) Certain options are not suitable for Zone 2 (IEC) / Class I, Division 2 applications.

## FUNCTIONAL SPECIFICATIONS

### Enclosure

The enclosures are free-standing, floor mounted, steel industrial enclosures containing:

- ▶ Vertically mounted 8-position Modular Baseplates for mounting Fieldbus Modules (FBMs)

- ▶ Vertically mounted 2-position Modular Baseplates for mounting Field Control Processors 270 (FCP270s) /Fieldbus Communications Modules (FCMs)
- ▶ FPS400-24 power supplies (single or redundant power).

### Input Power (Optionally Redundant)

Refer to PSS 21H-2W3 B4

## ENVIRONMENTAL SPECIFICATIONS

### Ingress Protection Ratings

#### VENTED

##### *Door-Mounted Fans*

IP 54 to EN 60 529/10.9191 / NEMA 12

##### *Roof-Mounted Fans*

IP 43 to EN 60 529/10.9191 / NEMA 12

#### SEALED

IP 55 to EN 60 529 / NEMA 12

IP 65 to EN 60 529/10.91 / NEMA 4

### Operating Temperatures

#### VENTED (THERMAL LOADING)

-20 to +60°C (-4 to +140°F)

Up to 750 Watts (Average)

-20 to +55°C (-4 to +131°F)

750 to 1000 Watts (Maximum)

#### SEALED (THERMAL LOADING)

-20 to +50°C (-4 to +122°F)

Up to 400 Watts (Average)

-20 to +45°C (-4 to +113°F)

400 to 500 Watts (Maximum)

### Storage Temperature

-40 to 70°C (-40 to 158°F)

### Relative Humidity

5 to 95% (noncondensing)

### Acoustic Noise Level<sup>(2)</sup>

#### ROOF-MOUNTED FANS

61 dB (A) at 1 m / 58 dB (A) at 3 m

#### DOOR-MOUNTED FANS

64 dB (A) at 1 m / 62 dB (A) at 3 m

#### SEALED ENCLOSURE (NO FANS)

Ambient / Ambient

### Dual Thermostat

#### HIGH ALARM SETTING

NC contact, Range - 0 to 60°C (32 to 140°F)

#### LOW ALARM SETTING

NO contact, Range - 0 to 60°C (32 to 140°F)

### Agency Certification

Enclosure is UL and UL-C approved. Enclosure meets all applicable European Union directives and is CE compliant. A complete listing of certifications is available from enclosure vendor. For installed I/A Series equipment, refer to PSS 21H-2W2 B3.

### Area Designation

Per customer order, vented and sealed are available for general purpose area; hazardous area (Zone 2 (IEC)/ Class I, Division 2, (North America)) must use sealed enclosure only.

#### NOTE

Vented enclosures cannot be ordered for hazardous area (Zone 2 / Class I, Division 2).

(2) Under normal operating conditions, with both fans running, at enclosure's mid-height at 46 dB (A) ambient noise level.

## PHYSICAL SPECIFICATIONS

### Mass

The mass of the enclosure is dependent upon the particular configuration. Consult with an Invensys representative if precise mass figures are required.

#### **VENTED ENCLOSURE (MAX. CONFIGURATION)**

800 mm wide x 800 mm deep - 234 kg (516 lb)

#### **SIDE PANEL**

2000 mm high x 800 mm deep - 6 kg (14 lb)

### Mounting

Floor

### CAUTION

To prevent injury, this enclosure must be bolted down. Refer to the installation guide.

### Construction

Sheet steel with textured, powder-coated finish

### Color

#### **SIDE PANELS, REAR WALL, ROOF, AND DOOR**

RAL 7035 - light gray - textured

#### **PLINTH**

RAL 7022 - umbra gray smooth

### Panel Thickness

#### **DOOR**

2 mm (14 ga)

#### **SIDE PANELS, ROOF**

1.5 mm (16 ga)

### Construction

#### **MATERIAL**

##### **Door**

Sheet steel, 2.0 mm (14 ga)

##### **Frame, Roof, Side Panels, Rear Wall, Gland Plates**

Sheet steel, 1.5 mm (16 ga)

##### **Base/Plinth**

Sheet steel and plastic

### FINISH

#### **Frame**

Dipcoat-primed, RAL 7044 smooth

#### **Door, Roof, Side Panels, Rear Wall**

Dipcoat-primed, powder-coated, RAL 7035 (light gray) textured

#### **Base/Plinth**

Dipcoat-primed, RAL 7022 (umbra gray) smooth, plastic cover caps RAL 9005 (jet black)

#### **Gland Plates and Internal Hardware**

Zinc-plated, passivated

### Cable Entry

#### **VENTED ENCLOSURE**

Bottom through gland plate(s)

Top through customer cutouts in enclosure top (For enclosure with roof-mounted fans, suggested entry is bottom)

#### **SEALED ENCLOSURE**

Bottom through steel panel and customer cutouts in panel

Top through customer cutouts in enclosure top

### Earthing (Grounding)

#### **ROOF, SIDEWALLS, REAR WALL, GLAND PLATES**

Automatic potential equalization built in

#### **DOOR**

Dedicated 4 mm<sup>2</sup> (11 ga) ground strap to enclosure frame

#### **ENCLOSURE**

Two M8 studs (one for each enclosure side)  
An optional isolated bus bar for additional earth (ground) points.

### Power Input Terminals

#### **TYPE**

Ring Lug

#### **WIRE SIZE**

Up to 6 mm<sup>2</sup> (10 AWG)

#### **RING LUG SIZE**

M4 Maximum (DIN 46 234/46 237), 9.6 mm maximum O.D.

### Termination Assembly Cabling


Universal mounting straps are supplied for securing, routing and strain relieving of termination assembly cables. Each strap supports up to a 75 mm (3 in) diameter cable bundle.

### FOR MORE INFORMATION

For additional information describing I/A Series enclosures for DIN rail mounted modules, refer to the following documentation:

Document Number	Description
PSS 21H-2W1 B3	DIN Rail Mounted FBM Subsystem Overview
PSS 21H-2W2 B3	DIN Rail Mounted FBM Equipment, Agency Certification
PSS 21H-2W3 B4	DIN Rail Mounted Power Supply
PSS 21H-2W6 B4	DIN Rail Mounted Modular Baseplates
PSS 21H-2X8 B3	G-Series Enclosures Overview
ISA-S71.04-1985 (not Invensys-supplied)	Environmental Conditions for Process Measurement and Control Systems: Airborne Contaminants

**DIMENSIONS - NOMINAL**

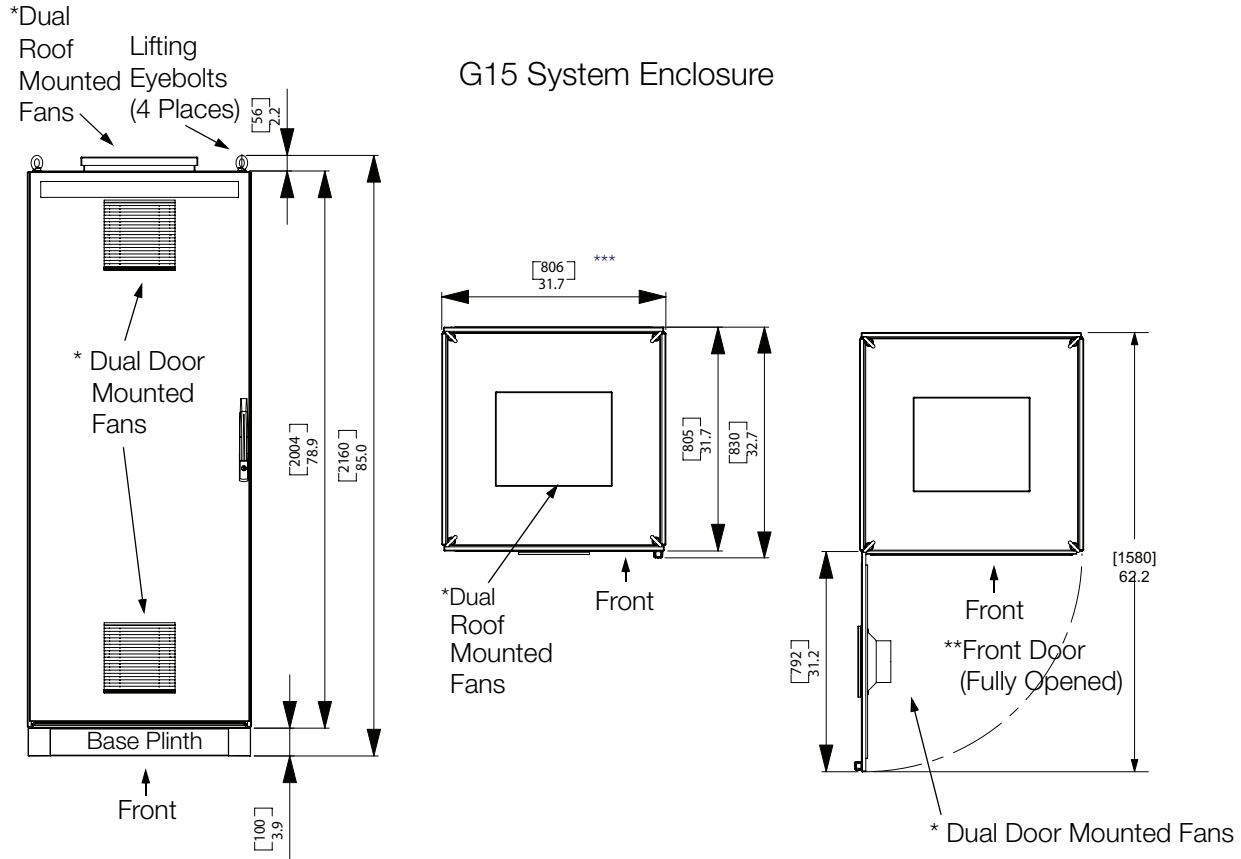

\* VENTED ENCLOSURES ONLY - EITHER ROOF- OR DOOR-MOUNTED CONFIGURATIONS CAN BE ORDERED.

\*\* DOORS ARE FACTORY-CONFIGURED FOR LEFT-HAND SWING, BUT CAN BE RECONFIGURED AT SITE FOR RIGHT-HAND SWING.

\*\*\* WITH SIDE PANELS, WITHOUT SIDE PANELS 800/31.5



33 Commercial Street  
Foxboro, MA 02035-2099  
United States of America  
www.foxboro.com  
Inside U.S.: 1-866-746-6477  
Outside U.S.: 1-508-549-2424  
or contact your local Foxboro  
representative.  
Facsimile: 1-508-549-4999

Invensys, Foxboro, and I/A Series are trademarks of Invensys plc, its subsidiaries, and affiliates.  
All other brand names may be trademarks of their respective owners.

Copyright 2007 Invensys Systems, Inc.  
All rights reserved

MB 21A

Printed in U.S.A.

0607