


# I/A Series<sup>®</sup> Hardware

## 0 to 10 V dc, Contact/dc Input/Output Interface Module (FBM17)

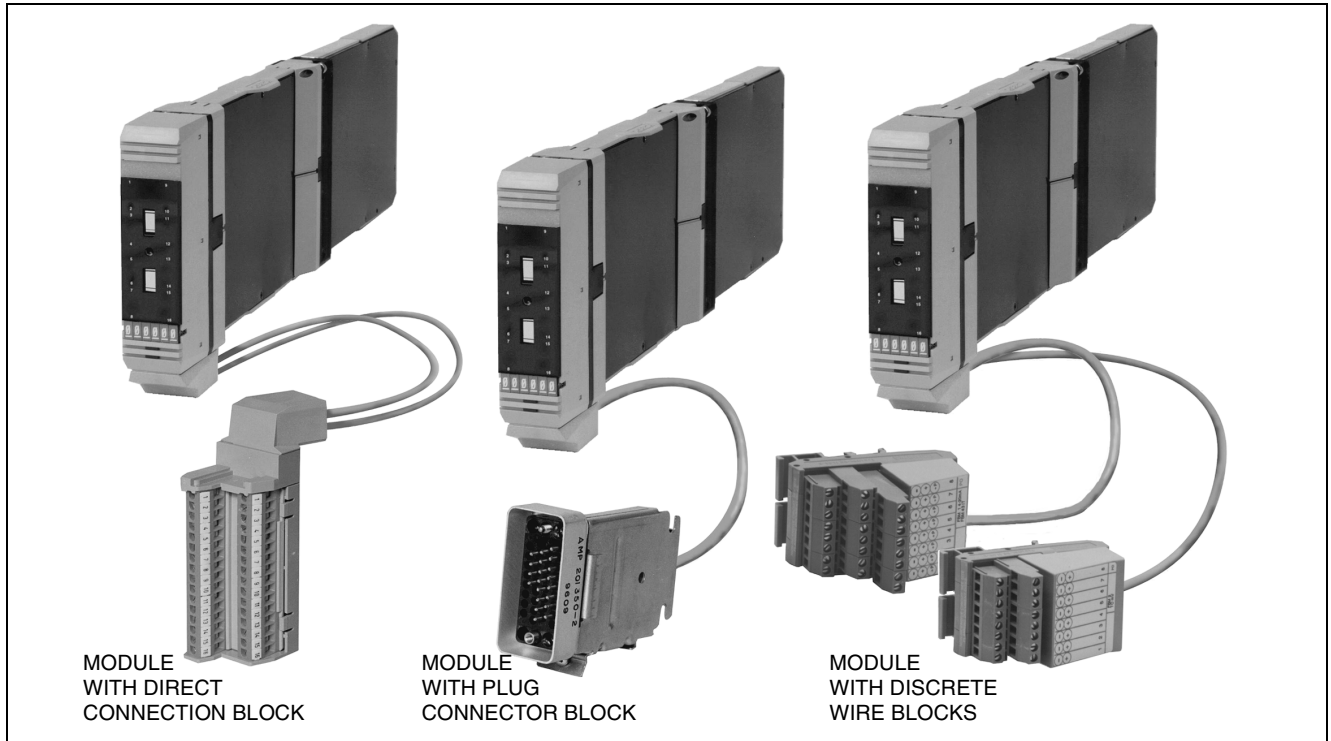

The 0 to 10 V dc, Contact/dc Input/Output Interface Module is a main module that provides the following input and output functions for analog and digital field signals.

### Analog Signals

INPUT FUNCTIONS – 4 channels used collectively for either:

- dc voltage measuring only, or
- slidewire (position) sensing only.

OUTPUT FUNCTIONS – 2 channels used for driving positioners, controllers or remote indicators.

### Digital Signals

INPUT FUNCTIONS – 4 channels used collectively for either:

- contact sensing only, or
- dc voltage monitoring only.

OUTPUT FUNCTIONS – 4 channels used collectively for either:

- dc output switching with an external source only (e.g. to control powering of various external loads), or
- dc output switching with an internal source only (e.g. to power external solid state relays or other similar devices).

The module performs the signal conversion required to interface these analog and digital (i.e. on/off state) electrical input/output signals from/to the field sensors/actuators to/from the redundant Fieldbus. In addition, it executes either the Analog I/O or Digital I/O application program.

The configurable options for each analog program are Input Resolution, Fail-safe Configuration (Hold/Fallback) and Output Fail-safe Fallback Data. The configurable options for each digital program are Input Filter Time, Fail-safe Configuration, Fail-safe Fall Back and Sustained or Momentary Outputs.

If the Momentary Output configuration is selected, then Pulse Output Interval is also configurable.

Configurable options for inputs are exercised on a per module basis; those for outputs are exercised on a per channel basis.

## FUNCTIONAL SPECIFICATIONS

### Common Characteristics

#### ISOLATION

The module withstands, without damage, a potential of 600 V ac on the analog channels or 1250 V ac on the digital channels (see notes below) applied for one minute between the following points.

#### *Analog Input to Earth (Ground)*

600 V ac

#### *Analog Output to Earth (Ground)*

600 V ac

#### *Analog Input to Output*

600 V ac

#### *Digital Input Pair to Input Pair(a)*

1250 V ac

#### *Digital Output Pair to Output Pair(a)*

1250 V ac

#### *Digital Input Pair to Output Pair(a)*

1250 V ac

#### NOTE

This does not imply that these channels are intended for prolonged connection to voltages of these levels. Connection of channels to voltages in excess of those specified under the "Input Functions" and "Output Functions" sections of this specification violates electrical safety code requirements and may expose users to electric shock.

#### NOTE

Digital inputs are isolated in pairs (e.g., channels 1 and 2 are isolated from channels 3 and 4). When inputs are used with hazardous voltages (greater than 60 V dc), both channels of a pair must be used with hazardous voltages. Hazardous and nonhazardous voltages must not be mixed within a channel pair.

### POWER REQUIREMENTS

#### *Input Voltage Range (redundant)*

26 to 42 V dc

#### *Consumption*

11 W (maximum)

### HEAT DISSIPATION

9 W (maximum)

### INDICATORS (mounted on termination assembly)

#### *Operational Status*

2 light-emitting diodes (LEDs)  
(1 red and 1 green)

#### *Digital Input Channel Status*

4 LEDs (1 per channel)

#### *Digital Output Channel Status*

4 LEDs (1 per channel)

### FIELD TERMINATION CONNECTIONS(b)

#### *Discrete Wire Blocks*

32 screw-clamp terminals (2 blocks using  
16 terminals per block)

#### *Plug Connector Block*

34-pin connector. Mates with:

- Burndy MSD 34 PM 118  
(plug with bar-type cable clamp)
- Burndy MSD 34 PM 124  
(plug with clamshell hood)
- Burndy MSD 34 PM 824  
(plug with suitcase hood)
- or equivalent

#### *Direct Connection Block*

32 screw-clamp terminals

### COMMUNICATION

Via the redundant Fieldbus

### Analog Signals

#### INPUT FUNCTIONS

##### *Capacity*

4 independent channels

##### *Configurable Specifications*

See Table 1.

##### *Voltage Measuring*

See Figure 1 (Analog Input Configurations)

##### *Range (each channel)*

-0.2 to 10.2 V dc

##### *Rated Mean Accuracy (each channel)*

±0.025% of span

##### *Slidewire (Position) Sensing*

See Figure 1 (Analog Input Configurations)

##### *Excitation Reference Voltage*

10 V dc ±2%

##### *Excitation Reference Current*

10 mA (maximum)

##### *Slidewire Resistance*

1 k Ω to 100 k Ω (nominal)

(a) Within the digital channel pairs, each of the two channels shares a common power supply and return.

(b) The discrete wire or plug connector block is available on termination cable assemblies for all enclosures excluding the Field Enclosure 4 and Multiple (Bridged) Industrial Enclosure 32. The direct connection block is available only on the termination cable assembly for the Field Enclosure 4. Multiple (Bridged) Industrial Enclosure 32 uses the plug connector block only.

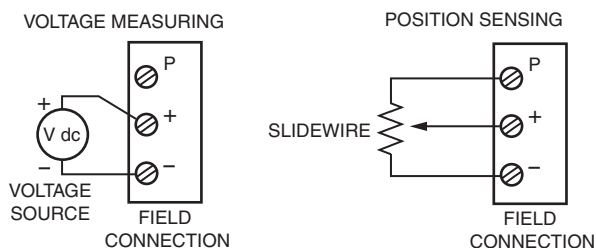


Figure 1. Analog Input Configurations




Figure 2. Analog Output Configuration

Table 1. Configurable Specifications for Analog Input Channels

Conversion Time (Seconds)	Settling Time(a) (Seconds)	Linearity Error(b) (% of Range)	Resolution (Bits)
0.1	0.3	0.013	12
0.2	0.5	0.008	13
0.5	1.1	0.005	14
1.0	2.1	0.005	15

(a) Output value settles within a 1% band of steady state for a 10 to 90% input step change.

(b) Monotonic (signal used for Fieldbus communications either increases or remains the same for increasing analog input signals)

### FUNCTIONAL SPECIFICATIONS (Cont.)

#### Analog Signals (Cont.)

##### OUTPUT FUNCTIONS (Output Drivers)

See Figure 2 (Analog Output Configuration)

##### Capacity

2 independent channels

##### Range (each channel)

-0.2 to 10.2 V dc

##### Current (each channel)

2 mA (maximum)

##### Rated Mean Accuracy

$\pm 0.05\%$  of span

##### Settling Time

150 ms maximum (to 1% of final value for 10 to 90% step change)

##### Linearity Error

$\pm 0.025\%$  of span

##### Resolution

12 bits

#### Digital Signals

##### INPUT FUNCTIONS

##### Capacity

4 independent channels

##### Filter Time

Configurable (4, 8, 16, or 32 ms)

#### Digital Signals (Cont.)

##### INPUT FUNCTIONS (CONT.)

##### Contact Sensor

See Figure 3 (Digital Input Configurations)

##### Range (each channel)

Contact open (off) or closed (on)

##### Open-Circuit Voltage

24 V dc  $\pm 10\%$

##### Short-Circuit Current

2.5 mA (maximum)

##### ON-State Resistance

1 k  $\Omega$  (maximum)

##### OFF-State Resistance

100 k  $\Omega$  (minimum)

##### Voltage Monitor

See Figure 3 (Digital Input Configurations)

##### ON-State Voltage

15 to 130 V dc

##### OFF-State Voltage

0 to 5 V dc

##### Current

2.2 mA (typical) at 5 to 130 V dc

##### Source Resistance Limits (ON-State)

1 k  $\Omega$  (maximum) at 15 V dc

##### Source Resistance Limits (OFF-State)

100 k  $\Omega$  (minimum) at 130 V dc

**FUNCTIONAL SPECIFICATIONS (Cont.)**

**Digital Signals (Cont.)**

**OUTPUT FUNCTIONS**

*Capacity*

4 independent channels

*Output Switch (with external source)*

See Figure 4 (Digital Output Configurations)

*Applied Voltage*

60 V dc (maximum)

*Load Current*

0.5 A (maximum)

*Shorted-Load Duration*

Indefinite (duty cycle current limit on overload)

*ON-State Current Limit*

0.75 A (typical)

*OFF-State Leakage Current*

< 100  $\mu$ A (typical)

1.0 mA (maximum)

**Inductive Loads**

Require a protective diode connected across the load (see Figure 4 diagram with protective diode).

Diode must be capable of conducting maximum expected load current and have a voltage rating greater than 1.3 times the supply voltage.

**Output Switch (with internal source)**

See Figure 4 (Digital Output Configurations)

**Output Voltage (no load)**

11 V dc  $\pm$ 2 V dc

**Source Resistance**

660  $\Omega$  (nominal)

**Shorted-Output (ON-State) Duration**

Indefinite

**OFF-State Leakage Current**

< 100  $\mu$ A (typical)

0.5 mA (maximum)

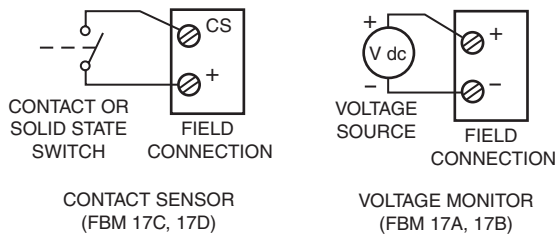


Figure 3. Digital Input Configurations

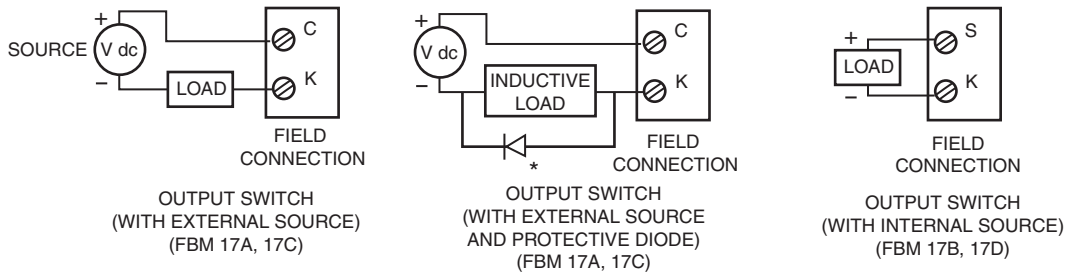


Figure 4. Digital Output Configurations

---

**ENVIRONMENTAL SPECIFICATIONS(a)****Operating**

## TEMPERATURE

0 to 60°C (32 to 140°F)

## RELATIVE HUMIDITY

5 to 95% (Noncondensing)

## ALTITUDE

-300 to +3,000 m (-1,000 to +10,000 ft)

**Storage**

## TEMPERATURE

-40 to +70°C (-40 to +158°F)

## RELATIVE HUMIDITY

5 to 95% (Noncondensing)

## ALTITUDE

-300 to +12,000 m (-1,000 to +40,000 ft)

**Contamination**

Class G3 (Harsh) as defined in ISA Standard S71.04

(a) The environmental ranges can be extended by the type of enclosure containing the module. {Refer to the Product Specification Sheet (PSS) applicable to the enclosure that is to be used.}

**PHYSICAL SPECIFICATIONS****Mounting**

## WITH Y-ADAPTER

Installable in the 1x8 Mounting Structure,  
I/A Series Industrial Enclosures and Field  
Enclosure 8

## WITHOUT Y-ADAPTER

Installable in I/A Series Field Enclosure 4 and the  
1x8 FBM Mounting Structure.

**Mass**

1 kg (2.2 lb)





33 Commercial Street  
Foxboro, Massachusetts 02035-2099  
United States of America  
[www.foxboro.com](http://www.foxboro.com)  
Inside U.S.: 1-866-746-6477  
Outside U.S.: 1-508-549-2424 or contact your local Foxboro representative.  
Facsimile: 1-508-549-4999

Invensys, Foxboro, and I/A Series are trademarks of Invensys plc, its subsidiaries, and affiliates.  
All other brand names may be trademarks of their respective owners.

Copyright 1991-2003 Invensys Systems, Inc.  
All rights reserved